Carlo Gavazzi Controls S.p.A.



Environmental Product Declaration

Product name:

Site Plant:

EM24DINAV53XE1X (ENERGY)

via Safforze, 8 32100 – Belluno (BL)

in compliance with ISO 14025 and EN 50693

Program Operator	EPDItaly
Publisher	EPDItaly
Declaration Number	CGC20240916002
EPDItaly Registration Number	EPDITALY0844
Issue Date	05/12/2024
Valid to	05/12/2029





Environmental Product Declaration EM24DINAV53XE1X

General information

EPD Owner	Gavazzi Controls S.p.A., Via Lunigiana, 46
	20125 - Milano (MI) Italy
Reference production site(s)	www.gavazzi-automation.com Belluno plant: via Safforze, 8, 32100 – Belluno (BL)
Scope of application	This document refers to the device of the METERS family.
Programme Operator	EPDItaly - info@epditaly.it
Independent Verification	This declaration was developed according to the EPDItaly Regulations; further information and the Regulations themselves are available at www.epditaly.it
	Independent verification of the declaration and data carried out according to ISO 14025:2010 □ _Internal ⊠ _External
	Third-party verification performed by: ICMQ SpA, via De Castillia, 10 20124Milan (www.icmq.it) Accredited by Accredia
CPC Code	4621 "Electricity distribution or control apparatus"
Company contact	<u>Giampaolo Tormen,</u> Certification Manager in Gavazzi Group.
Technical support	Aequilibria Srl - SB P.le della Stazione, 8 35131 – Padova (PD) - ITALIA
Comparability	Environmental statements published within the same product category, but from different programs, may not be comparable. In particular, EPDs of similar products may not be comparable if they do not comply with the relevant Technical Standard.
Responsability	Carlo Gavazzi Controls S.p.A. releases EPDItaly from any non- compliance with environmental legislation. The holder of the declaration will be responsible for the supporting information and evidence; EPDItaly disclaims any responsibility regarding the manufacturer's information, data and results of the life cycle assessment.



Environmental Product Declaration EM24DINAV53XE1X

Reference documents	This statement was developed following the EPDItaly
	Program Regulations (Rev.6 of 30/10/2023 available at
	www.epditaly.it.
	The EN 50693:2019 standard is the framework reference for
	PCR "Electronic and electrical products and systems" (PCR EPDItaly007).
	PCR EPDItaly011 ("Electronic and electrical products and
	systems – Meters") integrates PCR EPDItaly007 and provides
	, , , ,
	additional technical and regulatory requirements to be
	applied for the category of products classified as "meters".
PCR – Product Category Rules	Core-PCR: EPDITALY007 "Electronic and electrical product
	and systems" Rev. 3 of 13/01/2023
	Sub-PCR: EPDITALY011 "Electronic and electrical product
	and systems -Meters" Rev. 1 of 01/07/2024
Date and revision of this document	05/12/2024

Table 1. General information of EPD



Environmental Product Declaration EM24DINAV53XE1X

Foreword

This document represents the EPD study conducted for the **EM24DINAV53XE1X** device manufactured by Carlo Gavazzi Controls S.p.A., in accordance with the EPDItaly Program and its Regulations, developed in accordance with ISO 14025 and aimed at providing a tool for the development, verification and publication of Environmental Product Declarations. The study was carried out in accordance with PCR EPDItaly011 (*PCR for electronic and electrical products and systems – Meters*), which identifies and documents the objective and scope of LCAbased information for the product category, the rules for producing additional environmental information, the life cycle stages to be included, the parameters to be addressed, and the manner in which the parameters are to be collected and communicated in a report.

Producer information and environmental policy

Carlo Gavazzi Controls SpA develops, manufactures and markets monitoring relays, timers, energy management systems, fieldbus systems, providing solutions for the industrial, residential and commercial automation markets, in the field of low voltage installations.

The products are marketed in Europe, North America and Asia-Pacific through a network of 22 own sales companies and about 60 independent national distributors. Carlo Gavazzi Controls has a production plant in Belluno (via Safforze 8, 32100 – Belluno).

The company already holds the following certifications, issued by accredited bodies:

- ➢ ISO9001 (since 1997)
- ➢ ISO14001 (since 2009)

Carlo Gavazzi Controls is committed to continuously reducing the environmental impact of its products throughout their life cycle, through the implementation of an environmentally conscious design process based on the principles of the EN 62430 standard and an ISO14001 certified environmental management system. The declared environmental claims have been assessed with a qualitative approach on the environmentally conscious design process.



Environmental Product Declaration EM24DINAV53XE1X

Product Information

The product under analysis is device **EM24DINAV53XE1X**, belonging to the METERS family, nominal consumption 2.9 W (0.0029 kW), weight 308.3 g (0.3083 kg) including packaging and manual. The adopted functional unit was defined, based on the reference PCR, as **a device**, **characterized by its own operating power at 0.0029 kW for a life time (RSL - Reference Service Life'') of 20 years, including its packaging, and operating throughout its useful life.**

These are electrical energy measurement devices, performance class 1, indirect measurement, and comply with the following international regulations: Electromagnetic Compatibility Directive, RoHS Directive.

Product assembly and testing are carried out at the Carlo Gavazzi Controls production site.

Regarding the use phase, the product does not require periodic maintenance, is considered to be active throughout its estimated useful life of **20 years**, with a nominal consumption of 2.9 W at a voltage of 120-277 V ac L-N, 50/60Hz.

The finished device is then sent to the various Gavazzi distribution centers or, in some cases, directly to a specific customer.

Product family	Meters	
Product identification number	EM24DINAV53XE1X	
Technical Data	Power: 2.9 W (0.0029 kW) Frequency: 50/60Hz Weight: 0.25563 kg (packaging excluded) Service Life Time (RLS): 20 years Current Intensity: In = 5 A, Imax = 10A	
Packaging	Weight: 0.05267 kg (52.67 g) Material: Paper and Cardboard	0

Table 2. Product related information EM24DINAV53XE1X



Environmental Product Declaration EM24DINAV53XE1X

• Materials and constituents of the product

The declaration of materials is made in accordance with EN IEC 62474.

The products comply with substance restrictions in the EU RoHS directive (2011/65/EU).

Any recycled material content in the device is unknown.

Below is the total mass of the product (including packaging) and the weight percentages of each individual raw material to the total product.

Total mass of the device	0.3083 kg (including packaging)
--------------------------	---------------------------------

Raw Material Category SCLAM	SCLAM	SCLAM description	% of total weight	% of category to total weight
РСВ	PCB-COM	Printed circuit boards complessi (piu di due	2.04%	14 100/
	PCB-COM	strati)	2.04%	14.19%
	PCB-SEM	Printed circuit boards semplici (fino a due strati)	2.25%	
	PCB-SEM	Printed circuit boards semplici (fino a due strati)	7.01%	
	PCB-SEM	Printed circuit boards semplici (fino a due strati)	2.89%	
Electronic	CNTRS	Connectors	0.040%	10.918%
Components	CNTRS	Connectors	0.097%	
	CNTRS	Connectors	0.152%	
	CNTRS	Connectors	1.781%	
	RESMD	SMD Resistors	0.001%	
	RESMD	SMD Resistors	0.001%	
	RESMD	SMD Resistors	0.001%	
	RESMD	SMD Resistors	0.002%	
	RESMD	SMD Resistors	0.002%	
	RESMD	SMD Resistors	0.001%	
	RESMD	SMD Resistors	0.001%	
	RESMD	SMD Resistors	0.001%	
	RESMD	SMD Resistors	0.001%	
	RESMD	SMD Resistors	0.003%	
	QUSMD	SMD - Quartzes and crystal resonators	0.013%	



CCERS	SMD - Ceramic capacitors	0.006%	
CCERS	SMD - Ceramic capacitors	0.011%	
CCERS	SMD - Ceramic capacitors	0.003%	
CCERS	SMD - Ceramic capacitors	0.006%	
CCERS	SMD - Ceramic capacitors	0.003%	
CCERS	SMD - Ceramic capacitors	0.003%	
CCERS	SMD - Ceramic capacitors	0.002%	
CCERS	SMD - Ceramic capacitors	0.006%	
CCERS	SMD - Ceramic capacitors	0.012%	
CCERS	SMD - Ceramic capacitors	0.005%	
CCERS	SMD - Ceramic capacitors	0.049%	
	SMD - Diodes, zeners, leds, transils, rectifier		
DDSMD	bridges	0.002%	
ICSMD	SMD - Integrated circuits	0.002%	
ICSMD	SMD - Integrated circuits	0.003%	
ICSMD	SMD - Integrated circuits	0.023%	
MICRO	Microprocessors	0.227%	
ICSMD	SMD - Integrated circuits	0.014%	
INDCS	SMD - Inductors	0.013%	
CCERS	SMD - Ceramic capacitors	0.003%	
RESTD	Resistors	0.876%	
VARIP	PTH - Varistors	1.070%	
CCERP	PTH - Ceramic capacitors	0.188%	
CELEP	PTH - Electrolytic capacitors	0.230%	
CFLMP	PTH - Film capacitors	1.680%	
INDCP	PTH - Inductors	1.194%	
CNTRS	Connectors	0.092%	
RESMD	SMD Resistors	0.004%	
RESMD	SMD Resistors	0.004%	
CCERS	SMD - Ceramic capacitors	0.008%	
DDOND	SMD - Diodes, zeners, leds, transils, rectifier	0.01.00/	
DDSMD	bridges	0.012%	
RESMD	SMD Resistors	0.001%	
RESMD	SMD Resistors	0.001%	
RESMD	SMD Resistors	0.001%	
RESMD	SMD Resistors	0.006%	
RESMD	SMD Resistors	0.001%	
RESMD	SMD Resistors	0.001%	
RESMD	SMD Resistors	0.001%	
RESMD	SMD Resistors	0.001%	



	C	
RESMD	SMD Resistors	0.006%
RESMD	SMD Resistors	0.008%
RESMD	SMD Resistors	0.005%
RESMD	SMD Resistors	0.009%
RESMD	SMD Resistors	0.044%
CCERS	SMD - Ceramic capacitors	0.005%
CCERS	SMD - Ceramic capacitors	0.006%
CCERS	SMD - Ceramic capacitors	0.001%
CCERS	SMD - Ceramic capacitors	0.001%
CCERS	SMD - Ceramic capacitors	0.011%
CCERS	SMD - Ceramic capacitors	0.012%
CCERS	SMD - Ceramic capacitors	0.003%
CCERS	SMD - Ceramic capacitors	0.003%
CCERS	SMD - Ceramic capacitors	0.002%
CCERS	SMD - Ceramic capacitors	0.032%
CTANS	SMD - Tantalum capacitors	0.097%
	SMD - Diodes, zeners, leds, transils, rectifier	
DDSMD	bridges	0.002%
DDSMD	SMD - Diodes, zeners, leds, transils, rectifier bridges	0.002%
DDOMD	SMD - Diodes, zeners, leds, transils, rectifier	0.0000/
DDSMD	bridges SMD - Diodes, zeners, leds, transils, rectifier	0.023%
DDSMD	bridges	0.062%
	SMD - Diodes, zeners, leds, transils, rectifier	
DDSMD	bridges	0.031%
DDOMD	SMD - Diodes, zeners, leds, transils, rectifier	0.0700/
DDSMD	bridges SMD - Diodes, zeners, leds, transils, rectifier	0.076%
DDSMD	bridges	0.001%
	SMD - Diodes, zeners, leds, transils, rectifier	
DDSMD	bridges	0.003%
DDCMD	SMD - Diodes, zeners, leds, transils, rectifier	0.1000/
DDSMD	bridges SMD - Diodes, zeners, leds, transils, rectifier	0.169%
DDSMD	bridges	0.021%
	SMD - Diodes, zeners, leds, transils, rectifier	
DDSMD	bridges	0.065%
TRSMD	SMD - Transistors and mosfets	0.121%
ICSMD	SMD - Integrated circuits	0.005%
ICSMD	SMD - Integrated circuits	0.025%
INDCS	SMD - Inductors	0.009%
CCERS	SMD - Ceramic capacitors	0.113%



	CCERS	SMD - Ceramic capacitors	0.001%	
	RESMD	SMD Resistors	0.001%	
	CNTRS	Connectors	0.289%	
	TMPTH	PTH - Trimmers and potentiometers	0.253%	
	RESMD	SMD Resistors	0.006%	
	RESMD	SMD Resistors	0.002%	
	RESMD	SMD Resistors	0.001%	
	RESMD	SMD Resistors	0.005%	
	RESMD	SMD Resistors	0.013%	
	RESMD	SMD Resistors	0.002%	
	RESMD	SMD Resistors	0.001%	
	RESMD	SMD Resistors	0.003%	
	SWSMD	SMD - Switches and tact switches	0.428%	
	QUSMD	SMD - Quartzes and crystal resonators	0.004%	
	CCERS	SMD - Ceramic capacitors	0.005%	
	CCERS	SMD - Ceramic capacitors	0.004%	
	CCERS	SMD - Ceramic capacitors	0.008%	
	CCERS	SMD - Ceramic capacitors	0.002%	
	CCERS	SMD - Ceramic capacitors	0.010%	
	CCERS	SMD - Ceramic capacitors	0.003%	
	CTANS	SMD - Tantalum capacitors	0.652%	
	DDSMD	SMD - Diodes, zeners, leds, transils, rectifier bridges	0.002%	
	TRSMD	SMD - Transistors and mosfets	0.002%	
	TRSMD	SMD - Transistors and mosters	0.002%	
	ICSMD	SMD - Integrated circuits	0.049%	
	ICSMD	SMD - Integrated circuits	0.025%	
	ICSMD	SMD - Integrated circuits	0.005%	
	ICSMD	SMD - Integrated circuits	0.003%	
	ICSMD	SMD - Integrated circuits	0.023%	
	MICRO	Microprocessors	0.211%	
	CNTRS	Connectors	0.062%	
Sclam product		Displays LCD	3.35%	27.01%
specific	OPTOX	Optocouplers	0.13%	_/.0±/0
specific	TBSTD	Standard terminal blocks	1.82%	
	TBSTD	Standard terminal blocks	2.21%	
	TRAFO	Transformers	3.31%	
	COILS	Coils, ferrites	16.15%	
	LEDXX	Leds - no infrared	0.04%	



Cables	CABLE-	Osklas slasvas and wikings DVO	10/	10/
	PVC	Cables, sleeves and wirings PVC	1%	1%
Small metallic	MESTD-ST	Standard metal parts steel	0.22%	1.15%
parts	MESTD-ST	Standard metal parts steel	0.92%	
Plastics	PLCUS-PC	Custom plastic parts polycarbonate	0.13%	30.91%
	PLCUS-			
	ABS	Custom plastic parts ABS	9.88%	
	PLCUS-PC	Custom plastic parts polycarbonate	0.32%	
	PLCUS-HO	Custom parts Hostaform	0.45%	
	PLCUS-SI	Custom parts silicone	0.17%	
	PLCUS-NY	Custom plastic parts nylon	0.14%	
	PLCUS-			
	ABS	Custom plastic parts ABS	2.78%	
	LAFRO-PC	Frontal labels	0.05%	
	PLCUS-PC	Custom plastic parts polycarbonate	16.55%	
	LAPAC	Packaging labels	0.44%	
Paper primary	BOXES	Carton boxes	12.71%	17.08%
packaging	BOXES	Carton boxes	1.41%	
	SHEET	Instruction sheets/ manuals	2.97%	

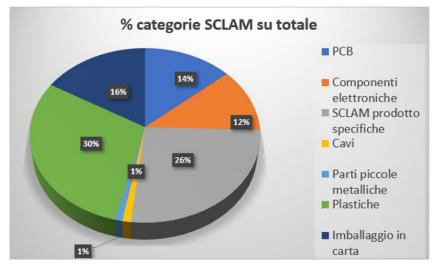


Figure 1. Material breakdown of the EM24DINAV53XE1X device



Environmental Product Declaration EM24DINAV53XE1X

Information related to the study

System boundaries	The boundaries of the study system are "cradle-to-grave".
Geographical validity	Global
Reference year data	2023
Reference tool	This EPD was generated using the results automatically generated by the Excel tool "LCA tool_dati 2023_GAV – rev4" of 15/11/2024

Table 4. Information related to the study

The assessment of all potential environmental impacts above is based on the entire life cycle of the product under analysis: production, distribution, installation, use and end of life.

The elements and processes considered for the assessment of impacts related to each phase are described below:

auxiliary materials and relate • production and processin consumption, air emissions, v • The energy sources behind is the italian residual mix 0,64	ng processes (involv waste generated b d the electricity grid	py production)
consumption, air emissions, vThe energy sources behind	waste generated b d the electricity grid	py production)
• The energy sources behind	d the electricity grid	
		used in manufacturing
is the italian residual mix 0,64		
	49 kg CO2 eq./kwn	(Ecoinvent 3.10)
• transportation from the	Gavazzi plant to	the latest distributio
logistics platforms		
FINISHED PROD	DUCT DISTRIBUTIC	N (CoD)
Distribution center finished product	% distributed to the CoD	Further distribution at the continental level?
CGC-CdD Italy	97.81%	Sì
CGC-CdD Spain	0.00%	Sì
CGC-CdD USA	2.08%	Sì
CGC-CdD Canada	0.00%	Sì
CGC-CdD Singapore	0.10%	Sì
	FINISHED PROD Distribution center finished product CGC-CdD Italy CGC-CdD Italy CGC-CdD Spain CGC-CdD USA CGC-CdD Canada CGC-CdD Singapore	FINISHED PRODUCT DISTRIBUTIO Distribution center finished product % distributed to the CoD CGC-CdD Italy 97.81% CGC-CdD Spain 0.00% CGC-CdD USA 2.08% CGC-CdD Canada 0.00%



Environmental Product Declaration EM24DINAV53XE1X

	disposal of secondary packaging
Installation	End of life of primary packaging.
Use and maintenance	Product Category: Meter (Energy)
phase	• usage scenario: 20-year service life, continuous operation at 100%
	rated load, rated power 2.9 W.
End of life	Device End of Life Scenario (WEEE).

Table 5. Processes considered at various stages of the study

The LCA study was carried out according to ISO 14040/14044 standards, following the guidelines of IS EN 50693:2019.

The software used for impact assessment is SimaPro 9.6.0.1; Ecoinvent 3.10 database.

The methods used to calculate impacts refer to the CML baseline and IPCC method for the climate change impact category.

Site-specific data were used for all of the following processes:

- production and transportation of device raw materials, auxiliary materials and packaging materials;
- manufacturing processes, plant energy consumption, air emissions and waste;
- weight, power of the device;
- transportation to the distribution center (last logistics platform).

Generic data were used for:

- recycling, energy recovery and disposal rates for primary and secondary packaging materials and WEEE (global data).

Default scenarios described in PCR 007 and PCR 011 were used for:

- transportation to the point of sale: intercontinental and local transportation scenario;
- Lifetime (RLS) of the device: 20 years.





Environmental Product Declaration EM24DINAV53XE1X

The potential environmental impacts assessed through an LCA of the **EM24DINAV53XE1X** device are given in Table 6 below.

Impacts were calculated using SimaPro Developer 9.6.0.1 software and the Ecoinvent 3.10 database.

		EN	VIRONA	MENTAL IM	PACT				
Impact indicators	Unit of	PRODUCTION phase		DISTRIBUTION phase	INSTALLATION Phase	Use and Maintenance Phase	END OF LIFE phase	TOTAL	
Indicators	measurement	UPSTREAM module	CORE module		DOWNSTREAM	module	dule		
GWP (TOT)	kg CO2 eq	8.33E+00	1.50E+0 0	1.66E-01	3.67E-03	2.80E+02	6.78E- 02	2.90E+02	
GWP - Fossil	kg CO2 eq	8.33E+00	1.53E+0 0	1.62E-01	2.08E-03	2.80E+02	6.78E- 02	2.90E+02	
GWP - Biogenic	kg CO2 eq	-1.22E-02	-3.25E- 02	4.14E-03	1.59E-03	7.16E-01	- 2.45E- 05	6.77E-01	
GWP - Luluc Land use and Land use change	kg CO2 eq	1.33E-02	5.86E- 04	5.00E-05	2.92E-06	5.93E-02	3.14E- 05	7.32E-02	
ODP (Ozone depletion)	kg CFC11 eq	2.57E-07	3.57E- 08	2.96E-09	1.88E-11	4.86E-06	1.73E- 10	5.16E-06	
AP (Acidification)	mol H+ eq	7.77E-02	4.42E- 03	6.03E-04	5.36E-06	1.21E+00	9.29E- 05	1.29E+00	
EP (Eutrophication, freshwater)	kg P eq	8.55E-03	2.19E- 04	9.69E-06	1.77E-07	1.21E-01	5.49E- 06	1.30E-01	
EP (Eutrophication, marine)	kg N eq	1.18E-02	9.24E- 04	2.24E-04	2.15E-06	2.15E-01	2.87E- 05	2.28E-01	
EP (Eutrophication, terrestrial)	mol N eq	1.26E-01	9.56E- 03	2.43E-03	2.24E-05	2.13E+00	2.84E- 04	2.27E+00	
POCP (Photochemical ozone formation)	kg NMVOC eq	4.17E-02	4.59E- 03	8.99E-04	7.54E-06	6.99E-01	8.41E- 05	7.46E-01	
ADPE (Resource use, minerals and metals)	kg Sb eq	2.15E-03	2.36E- 06	4.53E-07	2.90E-09	2.17E-03	1.06E- 07	4.32E-03	

Table 6. Results for various environmental impact categories for device EM24DINAV53XE1X

ADPF (Resource use, fossils)	LW	1.12E+02	2.52E+ 01	2.21E+00	1.57E-02	5.59E+03	2.13E -01	5.73E+03
WDP (Water use)	m3 depriv.	2.16E+00	3.88E- 01	8.46E-03	3.00E-04	4.67E+01	2.89E -03	4.93E+0 1



Environmental Product Declaration EM24DINAV53XE1X

			US	E OF RESOU	RCES			
Impact indicators	Unit of measurement	PRODUCTION phase		DISTRIBUTION phase	INSTALLATION Phase	Use and Maintenance Phase	END OF LIFE phase	Total
		UPSTREA M module	CORE module		Torda			
PENRE	MJ	1.11E+02	2.50E+0 1	2.21E+00	1.57E-02	5.59E+03	2.13E-01	5.73E+03
PENRM	MJ	1.67E+00	2.06E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+0 0	1.88E+00
PENRT	MJ	1.14E+02	2.54E+0 1	2.21E+00	1.57E-02	5.59E+03	2.13E-01	5.73E+03
PERE	MJ	1.08E+01	-5.64E- 01	3.53E-02	2.30E-04	3.30E+02	1.74E-02	3.40E+02
PERM	MJ	8.27E-01	1.49E+0 0	0.00E+00	0.00E+00	0.00E+00	0.00E+0 0	2.31E+00
PERT	MJ	1.16E+01	9.22E-01	3.53E-02	2.30E-04	3.30E+02	1.74E-02	3.42E+02
FW (Net use of fresh water)	m3	7.16E-02	1.16E-02	2.93E-04	7.91E-06	3.97E+00	1.03E-04	4.06E+00
MS (use of secondaty materials)	kg	1.39E-03	0.00E+0 0	0.00E+00	0.00E+00	0.00E+00	0.00E+0 0	1.39E-03
RSF (use of renewable secondary fuels)	LM	0.00E+00	0.00E+0 0	0.00E+00	0.00E+00	0.00E+00	0.00E+0 0	0.00E+00
NRSF (Use of non- renewable secondary fuels	LM	0.00E+00	0.00E+0 0	0.00E+00	0.00E+00	0.00E+00	0.00E+0 0	0.00E+00

Legend: **PENRE** = Use of non-renewable primary energy resources excluding non-renewable primary energy resources used as raw materials; **PENRM** = Use of non-renewable primary energy resources as raw materials; **PENRT** = Total use of nonrenewable primary energy resources; **PERE** = Use of renewable primary energy resources excluding renewable primary energy resources used as raw materials; **PERM** = Use of renewable primary energy resources as raw materials; **PERT** = Total use of renewable primary energy resources.

Table 7. Environmental impacts related to resource consumption for the EM24DINAV53XE1X device.



Environmental Product Declaration EM24DINAV53XE1X

Impact indicators	Unit of measurement	PRODUCTION phase		DISTRIBUTION phase	INSTALLATION Phase	Use and Maintenance Phase	END OF LIFE phase	TOTAL
		UPSTREAM module	CORE module					
Hazardous waste disposal (HWD)	kg	7.68E-03	7.73E-04	1.34E-03	5.04E-04	1.68E-01	4.19E-03	1.82E-01
Non- hazardous waste disposal (NHWD)	kg	4.03E-01	5.57E-02	1.24E-01	2.45E-02	2.45E-02	6.22E-03	6.38E-01
Radioactive waste disposal (RWD)	kg	2.09E-04	1.52E-05	7.04E-07	3.41E-09	3.41E-09	3.28E-07	2.25E-04
Materials for energy recovery (MER)	kg	0.00E+00	0.00E+00	5.58E-03	2.18E-03	0.00E+00	0.00E+00	7.76E-03
Materials for recycling (MFR)	kg	0.00E+00	5.56E-02	2.82E-02	2.46E-02	0.00E+00	5.70E-02	1.65E-01
Components for reuse (CRU)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE (exported thermal energy)	MJ	0.00E+00	0.00E+00	1.59E-02	6.21E-03	0.00E+00	0.00E+00	2.21E-02
EEE (exported electricity energy)	MJ	0.00E+00	0.00E+00	7.76E-03	3.03E-03	0.00E+00	0.00E+00	1.08E-02

Table 8. Waste-related environmental impacts for the EM24DINAV53XE1X device.



Environmental Product Declaration EM24DINAV53XE1X

References

- ISO 14040:2021 Environmental management Life cycle assessment Principles and framework
- ISO 14044:2021 Environmental management Life cycle assessment Requirements and guidelines
- ISO 14020:2000 Environmental labels and declarations General principles
- ISO 14025:2010, Environmental labels and declarations Type III environmental statements -Principles and procedures
- EN 50693:2019 Product category rules for life cycle assessments of electronic and electrical products and systems
- EPDItaly Program Regulations Rev. 6 of 30/10/2023
- Core-PCR: EPDITALY007 "Electronic and electrical product and systems" Rev. 3 of 13/01/2023
- Sub-PCR: EPDITALY011 "Electronic and electrical product and systems -Meters" Rev. 1 of 01/07/2024

Published by Carlo Gavazzi © _2024 - Carlo Gavazzi- All rights reserved